

# OSI

*Outgassing Services International*  
2224-H Old Middlefield Way, Mountain View, CA 94043 USA  
Phone +1 650 960 1390 Fax +1 650 960 1388  
[garrett@osilab.com](mailto:garrett@osilab.com)

## **Outgassing Measurements on HMB-34 Solid Lubricant**

*Prepared for:*

Gerald Griffith

JAMSS America

16055 Space Center Boulevard  
Suite 240  
Houston, TX 77062

(281) 461-3700

[griffith@jamssamerica.com](mailto:griffith@jamssamerica.com)

Reference No.: JAM010203-4

Purchase Order: 03-001

*Prepared by:*

*Jeff Garrett*

*January 28, 2003*

### **Limitation of Liability:**

OSI shall not be liable for any loss or damage arising out of services whether by way of negligence or breach of contract or otherwise, in any amount greater than the amount billed to the customer for the work leading to the claim of the customer. All claims must be received in writing within forty-five (45) days after delivery of the service report or such claim shall be deemed as waived.

**ASTM E 1559**  
**Outgassing/Deposition Kinetics Test**

**Test Method**

The material sample is placed in a temperature-controlled effusion cell in a vacuum chamber. Outgassing flux leaving the effusion cell orifice impinges on four QCMs which are controlled at selected temperatures. One of the QCMs is at 80 K to collect essentially all the impinging species. The total mass loss (TML) and outgassing rate from the sample are determined as functions of time from the mass deposited on this QCM and the sample-to-QCM view factor. The percent of outgassing species which are condensable on higher temperature surfaces is referred to as Volatile Condensable Material (VCM)

After the isothermal outgassing test, a QCM thermogravimetric analysis (QTGA) is performed on the collected outgassed species. The QCMs are heated at a controlled rate from their base temperatures to 398 K in order to volatilize the collected species. During this QCM heat-up the mass remaining on the QCMs is measured as a function of time and temperature.

In general, the species condensed on the QCMs have different evaporation characteristics (volatilities) and hence will leave a QCM surface at different temperatures during QTGA. Therefore, QTGA data are characterized by temperature regimes in which the deposit mass remaining on the QCM decreases due to evaporation of a particular species, separated by temperature regimes in which no species evaporate. The number of temperature regimes in which species are evaporating from the QCM indicates the number of major groups of species that were present in the outgassing flux. The relative amount of a given species in the outgassing flux can be estimated from the ratio of the mass loss associated with the evaporation of that species to the total deposit mass on the QCM. QTGA also provides an effective means for cleaning the QCM surfaces before subsequent outgassing tests.

The species outgassed from the sample during the isothermal test, and evaporating from the QCM during the QTGA also are monitored using a mass spectrometer. While the QCMs provide quantitative outgassing and deposition data, the mass spectrometer records the intensities of mass peaks which aid in the identification of the outgassed species.

**Test Parameters**

Outgassing testing was performed using the following chamber and test parameters.

- ° Chamber pressures were  $10^{-10}$  to  $10^{-8}$  torr
- ° View factor from a QCM to the sample was  $415.02 \text{ cm}^2$
- ° Sensitivity of each of the four QCMs was  $4.43 \times 10^{-9} \text{ g/cm}^2/\text{Hz}$

**References**

- ° ASTM E 1559, "Standard Test Method for Contamination Outgassing Characteristics of Spacecraft Materials."
- ° J.W. Garrett, A.P.M. Glassford, and J. M. Steakley, "ASTM E1559 Method for Measuring Material Outgassing/Deposition Kinetics", Journal of the IEST, pp. 19-28,
- ° A.P.M.Glassford and J.W.Garrett, "Characterization of Contamination Generation Characteristics of Satellite Materials", Final Report WRDC-TR-89-4114, Jun 82 - Aug 89

**ASTM E 1559**  
**Outgassing/Deposition Kinetics Test**

**Test Sample:**

HMB-34 Solid Lubricant

**Material Description:**

The material consisted of 5 square aluminum substrates each having a black coating on one side. The coating is a solid/dry lubricant manufactured by Kawamura Research Laboratories, Inc.

**Material Packaging:**

Each of the solid-lubricant coated substrates was wrapped in foil then single-bagged in a clear plastic zip-lock bag. Each of the bags was labeled with the sample identification number (No. 1, 3, 4, 5 and 6). These five substrates were then packaged in another zip-lock bag.

**Sample Description:**

The table below lists the dimensions of each of the five coated substrates as measured at OSI. JAMSS reported the substrates to be 50 mm by 50 mm by 0.1 mm thick with a 0.012 mm coating. The table also lists the initial mass of the aluminum substrates (measured at JAMSS), the mass of the substrates with the solid lubricant (measured at OSI), and the net lubricant mass. The five coated substrates were placed in the effusion cell and tested together as one sample. The sample area listed below includes only the one coated side of the substrates.

1	2.008	1.999	0.005	0.6833	0.7243	0.041
3	2.004	1.990	0.005	0.6825	0.7248	0.0423
4	1.999	1.985	0.005	0.6779	0.7189	0.041
5	2.009	1.996	0.005	0.6812	0.7237	0.0425
6	1.996	1.990	0.005	0.6806	0.7242	0.0436

**Material Supplier:**

The sample was supplied by Takeshi Nagano in the Utilization & Engineering Department of JAMSS in Japan.

**Sample Preconditioning:**

The sample was tested with no additional preconditioning.

**Sample Area:** 128.7 cm<sup>2</sup>

**Mass of Sample:** 0.21047 grams

**Sample Temperature:** 55.3 °C

**Test Duration:** 144 hr

**QCM Temperatures:** 80 K 233 K 263 K 298 K

**Isothermal Data File:** JAN2103G

**QTGA Data File:** JAN2703R

**Isothermal Test - QCM Data:**

QCM data from the end of the outgassing test are summarized in Table 1.

**Table 1**

	( $\mu\text{g}/\text{cm}^2$ )		(%)		(% of TML)
80 K TML =	0.81	=	0.0498	=	100.0
233 K VCM =	0.10	=	0.0059	=	11.9
263 K VCM =	0.08	=	0.0048	=	9.7
298 K VCM =	0.01	=	0.0008	=	1.6

Total outgassing rate data for the sample were calculated by differentiating the data obtained from the 80 K QCM. Figures showing these total outgassing rate data as a function of test time are attached. These outgassing rates are for species condensable at 80 K and so would not include certain gases such as nitrogen and oxygen.

**QCM Thermogravimetric Analysis - QCM Data:**

The QTGA test data can be used to determine the relative amounts of the species outgassed. As the temperature of the 80 K QCM is increased during QTGA, the collected species will evaporate from the QCM in order of their relative volatilities. The attached QTGA data are plotted as evaporation rate from the QCM as a function of QCM temperature.

**Mass Spectrometer Data:**

Data from the in situ mass spectrometer are sometimes used to help identify the outgassed species. Identification of outgassed species is not within the normal scope of work for this testing and is not ordinarily pursued because of the analysis time required. However, observations on some of the species that are contributing to the outgassing flux from the sample have been noted below. Species identifications are based on engineering and chemistry experience and have not been confirmed by comparison with standards.

Species observed in the outgassing flux are listed below.


<u>Species</u>	<u>Relative Abundance</u>	<u>Characteristic Ions (m/z)</u>
water	major	18
hydrocarbons	minor	55, 57, 69, 71, 83, 97
diethylhexyl phthalate - DEHP (plas	minor	149, 167, 279
polydimethyl silicones	minor	73, 147, 221, 281, 355
antistatic agent	minor	59, 72, 281

None of the detected species were present in the outgassing flux in significant amounts at the end of the 144-hour test.


**Attachments:**

- Figs. 1(a-b). Total Mass Loss from the Sample as a Function of Test Time.  
(Species Condensable on the 80 K QCM)
- Figs. 2(a-b). Volatile Condensable Material from the Sample on the Warmer QCMs  
as a Function of Test Time.
- Figs. 3(a-b). Total Outgassing Rate for the Sample as a Function of Test Time.  
(Species Condensable on the 80 K QCM)
- Figs. 4(a-b). QTGA Data: Evaporation Rate from the 80 K QCM of the Collected  
Outgassed Material as a Function of QCM Temperature.

**HMB-34 Solid Lubricant at 55.3°C.**

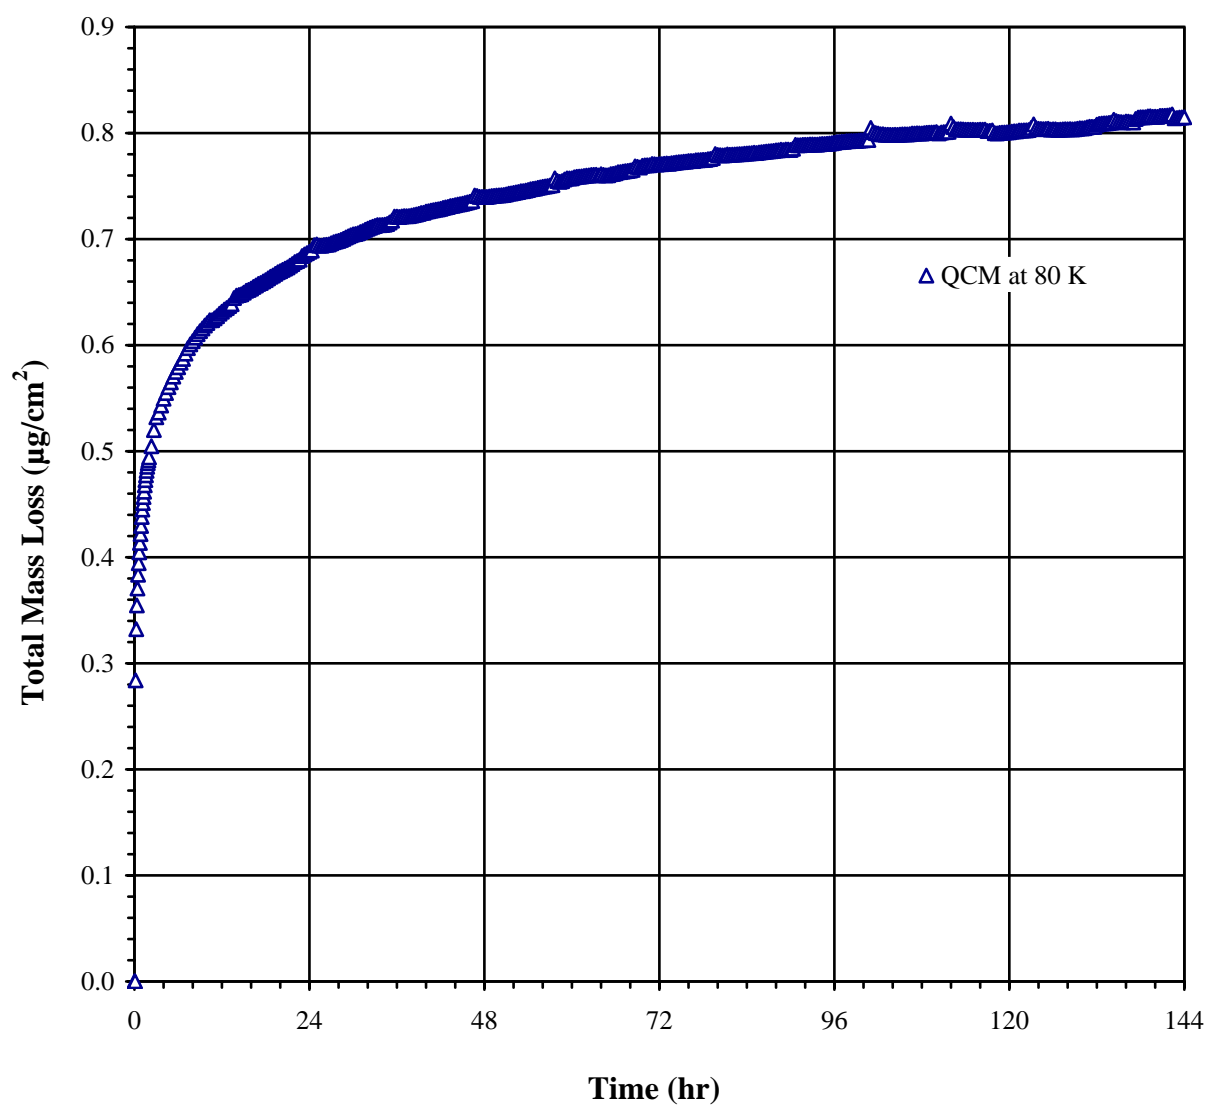

**Fig. 1(a)**

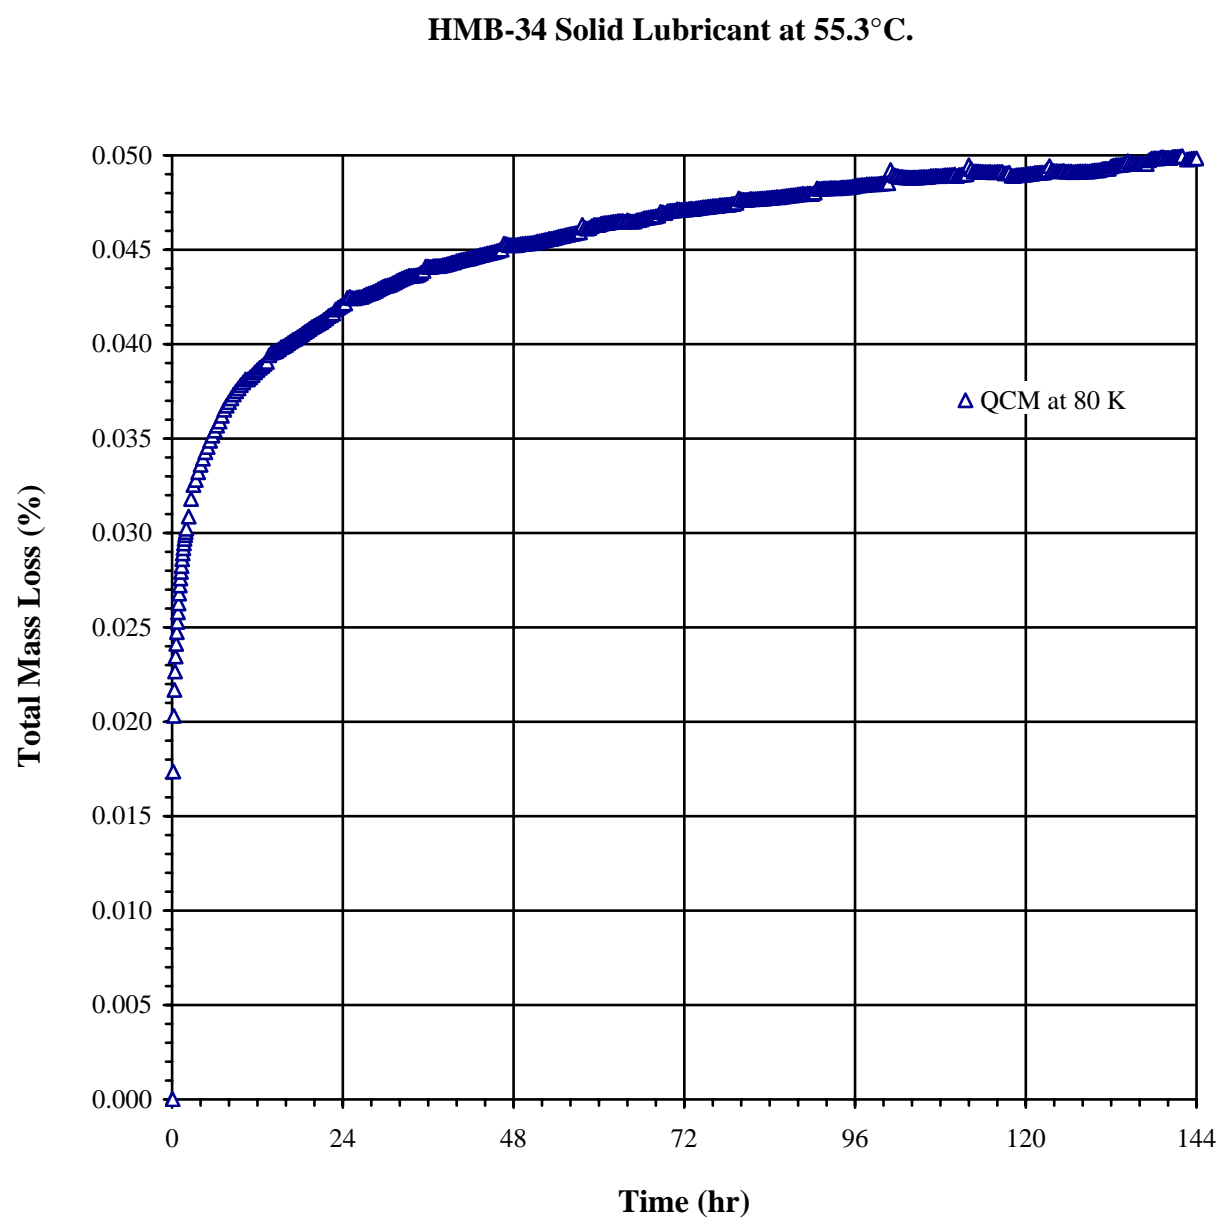

**Fig. 1(b)**

HMB-34 Solid Lubricant at 55.3°C.

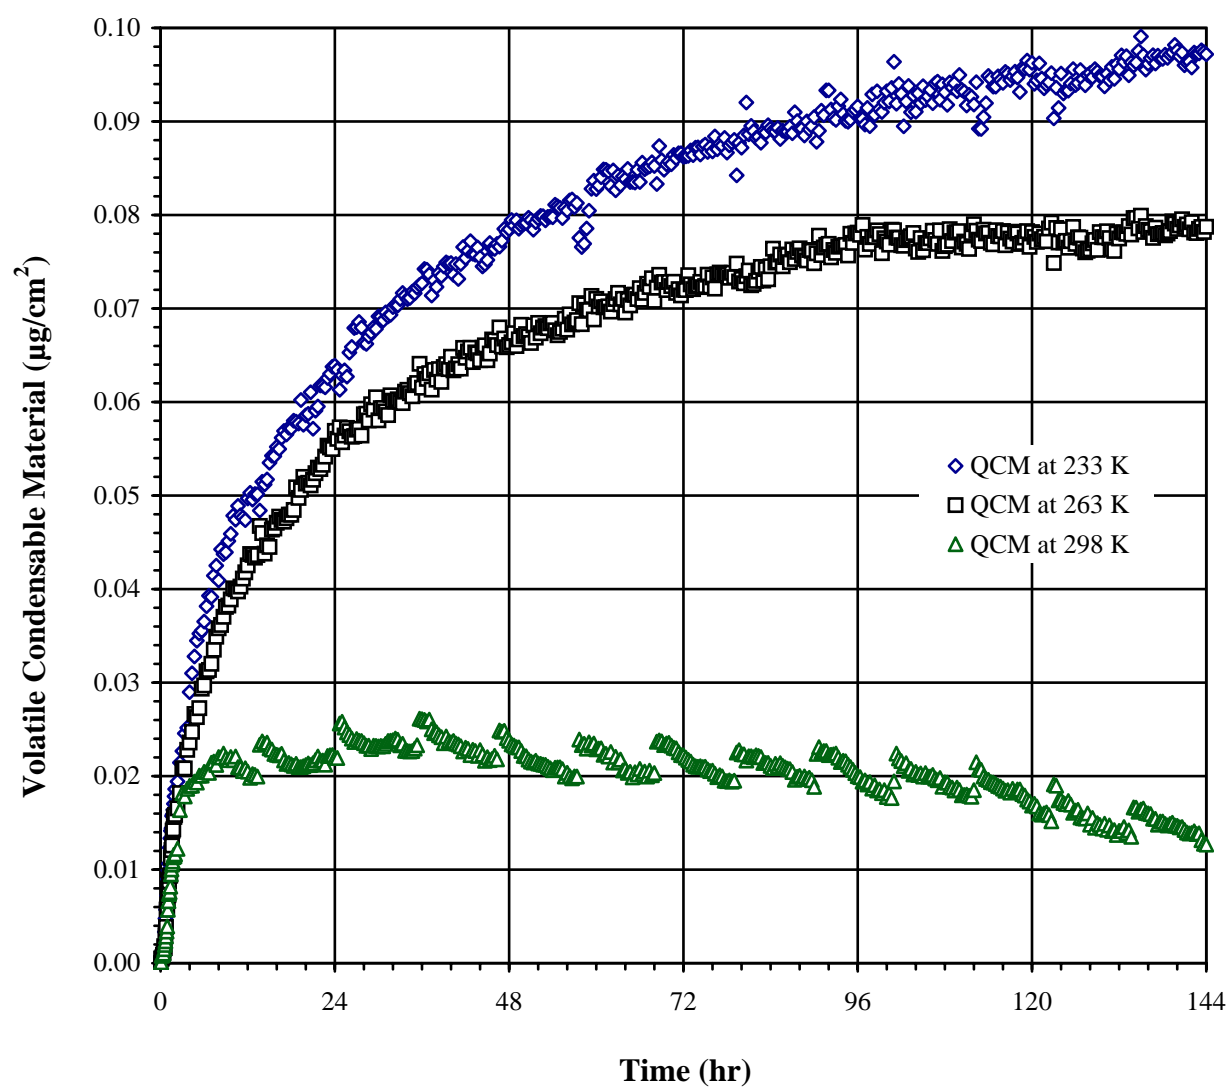


Fig. 2(a)



HMB-34 Solid Lubricant at 55.3°C.


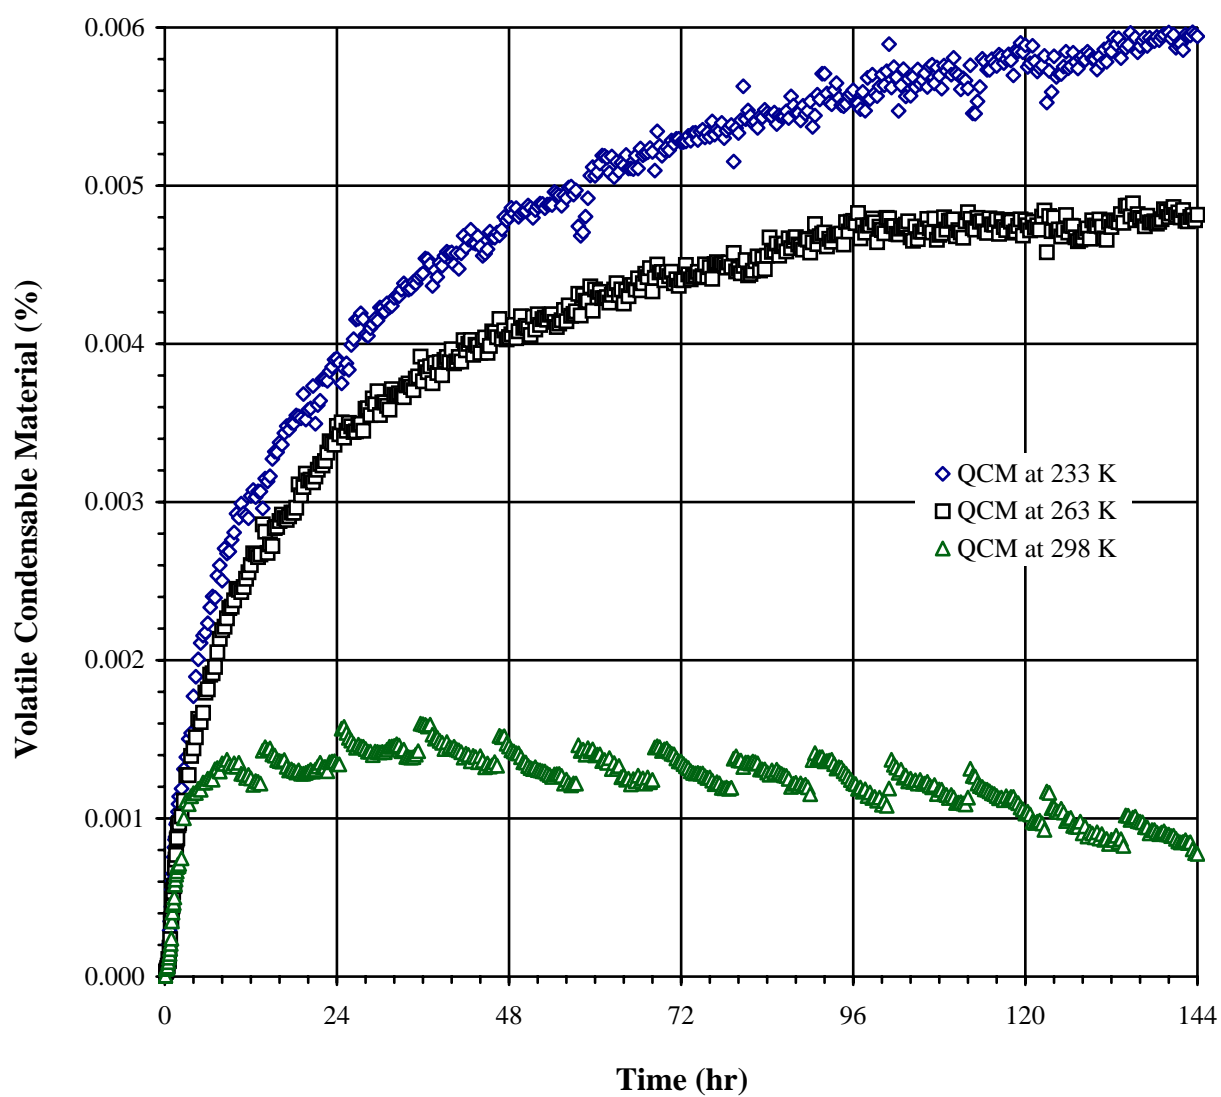



Fig. 2(b)

**HMB-34 Solid Lubricant at 55.3°C.**

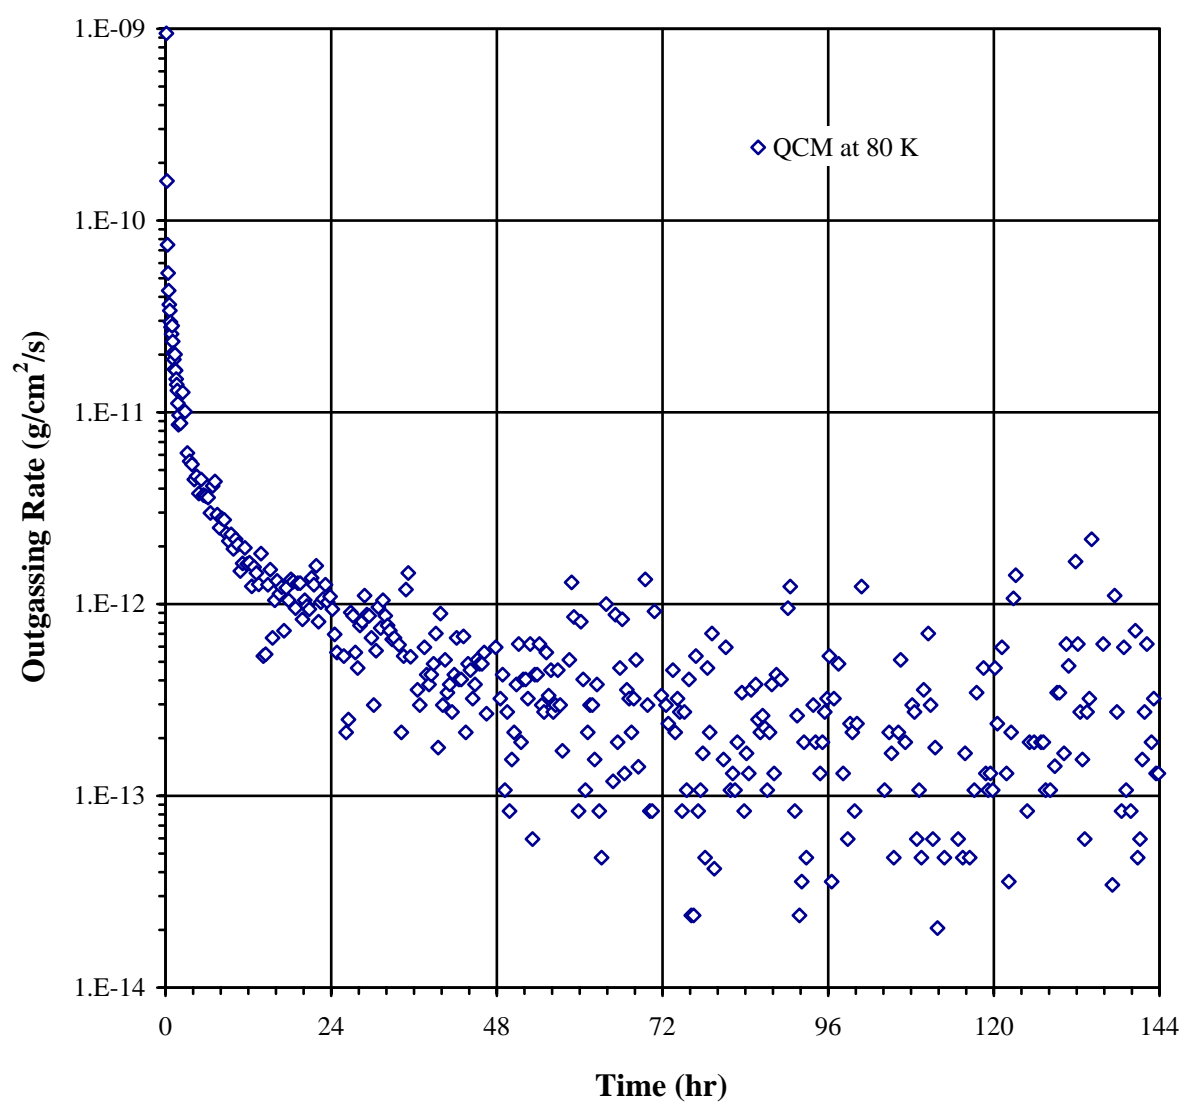


**Fig. 3(a)**

**HMB-34 Solid Lubricant at 55.3°C.**

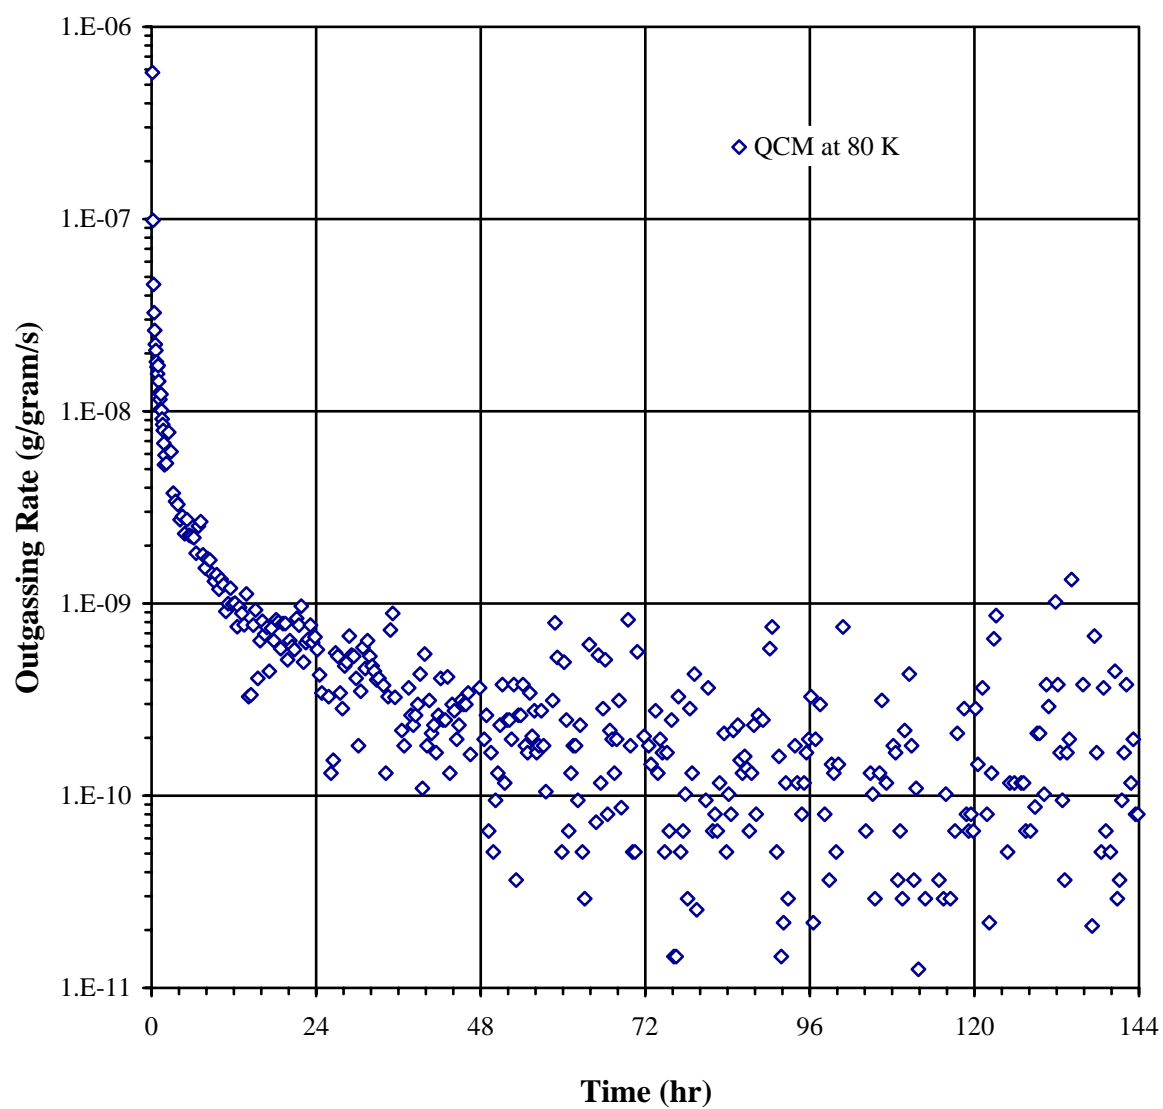


**Fig. 3(b)**

**QTGA after HMB-34 Solid Lubricant at 55.3°C.**

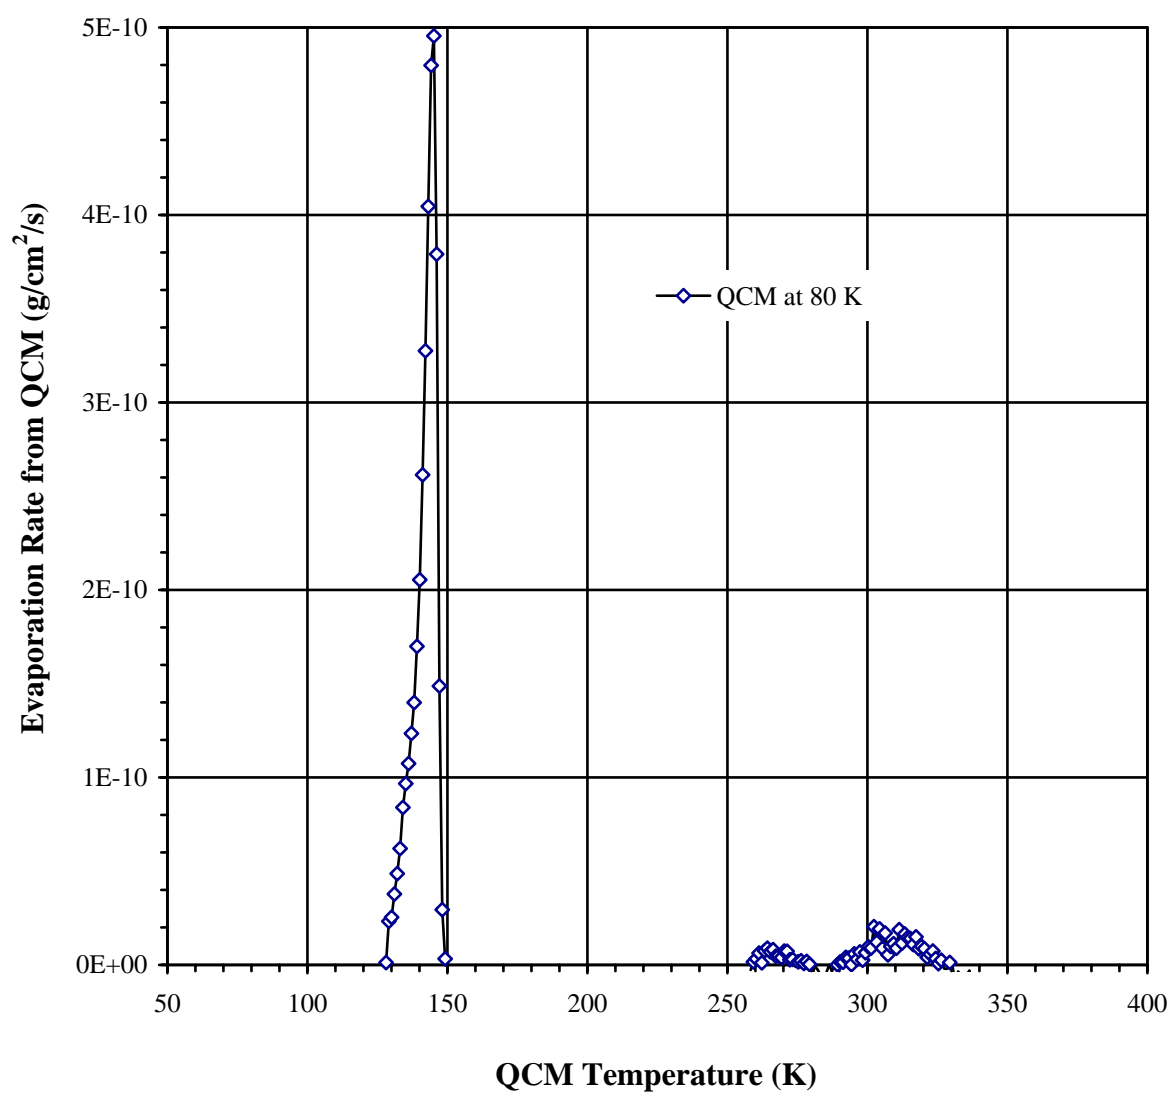

**Fig. 4(a)**

**QTGA after HMB-34 Solid Lubricant at 55.3°C.**

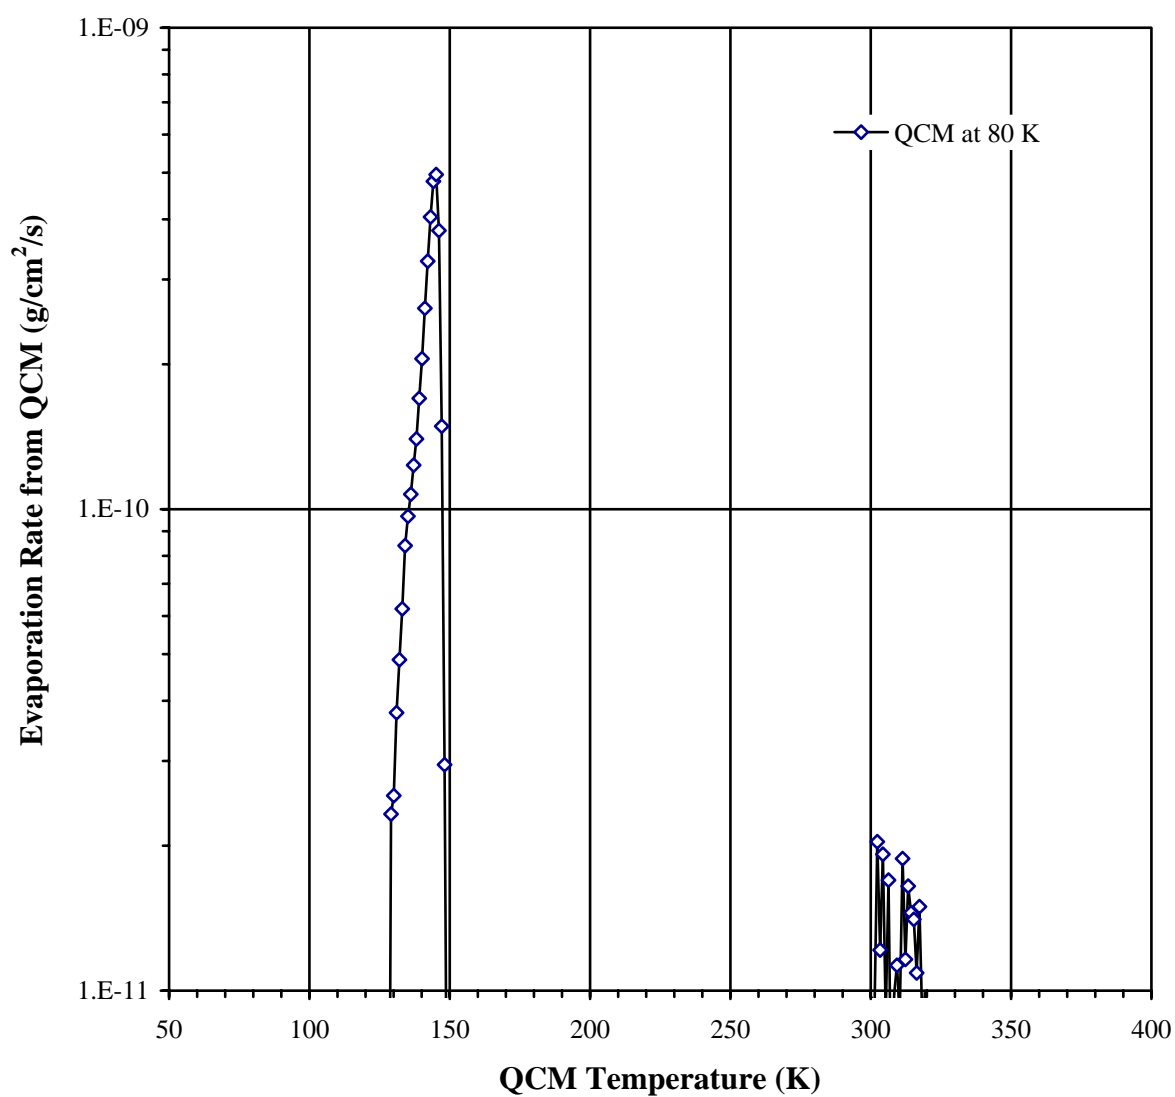

**Fig. 4(b)**